

40W LED A Corn Light Specification



REPLACE



SAMSUNG SMD5630 125lm/w

360° beam angle

Flame retardant material


IP65 waterproof design



SPECIFICATION

Model No.	Watts (W)	Color Accuracy (CRI)	Light Output (lm)	Input Voltage	IP	CCT (K)	Beam Angle	UL	DLC
DJ-CL40W-3000K-E39	40W	>80	>5000lm	100-277V	IP65	3000K	360°	Y	Y
DJ-CL40W-4000K-E39						4000K		Y	Y
DJ-CL40W-5000K-E39						5000K		Y	Y
DJ-CL40W-6000K-E39						6000K		Y	N

INSTALLATION

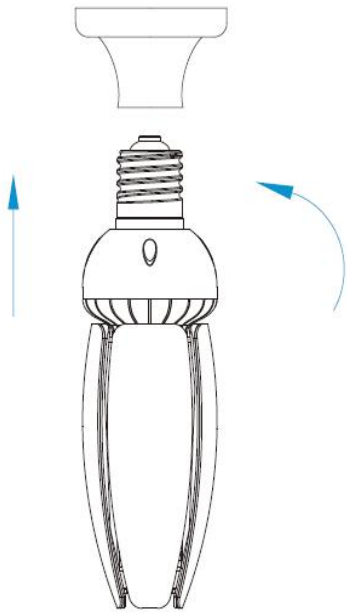


Step:1

Turn off power before installation.


Step:2

Shown as figure 1
Remove the ballast, Capacitor, and Ignitor(if existing)

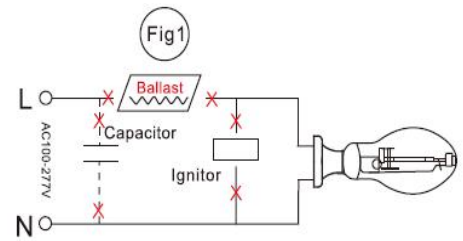


Step:3

Shown as figure 2
Make sure the Alternating Current Wires connected to E26 or E39 socket directly.
(Reattach or replace ground lead if one is needed)

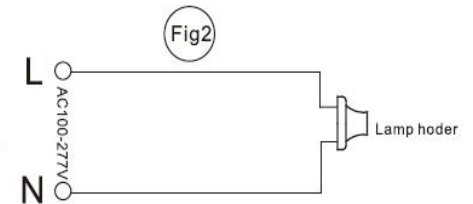

Step:4

Shown as figure 3
Screw the LED lamp onto the corresponding socket.

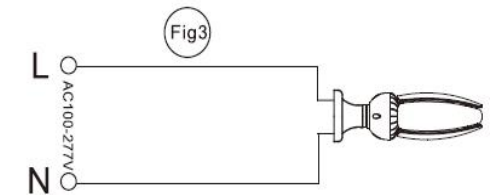

•Warning-Risk of fire or electric shock. LED retrofit lamp installation requires knowledge of luminaires electrical systems.

If not qualified, do not attempt installation, contact a qualified electrician.

•Warning-All the LED lamps can be used for dry, damp, wet locations, do not use where immersed to water.

•Warning-Do not dim. Do not use with dimmers, timers, or other control devices.

•All the LED lamps are suitable for use in totally enclosed fixtures.

•Operating Temperature: -30°C to 60°C (-22°F to 140°F)

APPLICATION



Wall Pack



Acorn



High/ Low Bay



Garage Light



Post Top



Ball



Pendant



Flood Light